Product Features

- Hygienic reduces mould & mildew.
- Adds insulation for heat & sound.
- Can be applied to virtually all surfaces - including tiles.
- No grouting.
- Quick, easy and clean to install.
- Easy to clean and maintain.
- Range of versatile profile fittings.
- Can be fitted onto existing ceilings no more painting!

Technical

Specification

- High impact modified u-PVC.
- 8mm twin-wall construction.
- Reaction to fire classification: C s3, d0
- Interlocking, 'tongue and groove' design with a flush flat finish.
- Range of edging and corner profiles.
- Optional finish products borders, coving, skirting, dado.

Cleaning & Maintenance

• Ensure traces of adhesive and silicone sealant are removed from surface of cladding before they set.

Use a mild soap solution and soft damp

- cloth to clean. Avoid use of abrasive or harsh chemical
- cleaning agents. Please request samples as colours may
- vary during printing of brochures. Colours may vary from batch to batch.

Limitations of Use

- Possible adverse reaction to solvent based adhesives - use recommended adhesives only.
- Application of adhesives, including adhesive tapes, to printed surface is not recommended.
- Exposure to extreme heat source may result in distortion of product.
- Despite a high level of surface proctection, prolonged exposure to U.V. may result in colour variation.

Terms and Conditions can be viewed at www.enviroclad.com/terms









Trims



























HOW TO INSTALL

- Ensure walls are clean & dry. Remove loose tiles, loose paper, flaking paint.
- Ensure shower tray/bath is fully installed. Remove/loosen fittings from walls. (Shower fittings, soap holders, etc).
- Seal bath trim (if using) into position.
- Fit bottom Starter trim onto Bath seal using sealant (Fig. 1).

• Fill bottom Starter trim with sealant.


- Cut top Starter trim to length, place in position and continue (Fig. 5).
- At a corner, fit Internal Corner Profile, seal with silicone or apply bead of silicone (Figs. 2 & 3).
- Cut first plank to length less 10mm, to allow fitting into top and bottom Starter trims (also allows for expansion).
- Apply adhesive to reverse of plank horizontal strips to width of plank, approx. every 400mm.
- Fit plank in position & press firmly onto wall.
- If cladding shower/over bath, seal lip of each plank with silicone before fitting the next to ensure watertight seal (Fig. 4).
- External Corner profiles are available for use on corners if required.
- When fitting cladding to a shower, Starter trim can be used as a stop bead at shower door or to finish edge of the final plank.
- Ensure adhesive and sealant are cleaned from face of cladding before they set.
- Cladding can be fitted behind radiators but is not suitable for use with a direct heat source, e.g. solid fuel cookers (heat greater than 60°C). A stainless steel or glass panel should be fitted behind cookers/hobs.
- Please refer to the current brochure for full product details.
- Recessed Lighting: Please note that only PL or CL type low energy downlighters are suitable for use with Enviroclad ceiling panels
- Return of goods will be accepted within 30 days with proof of purchase. After 30 days 20% restocking fee will be charged.
- Fitting at the fitter's discretion.


INTERNAL CORNERS (USING SEALANT) — FIG.2

INTERNAL CORNERS (USING PVC PROFILE) — FIG.3

info@enviroclad.com


+353 56 7752866

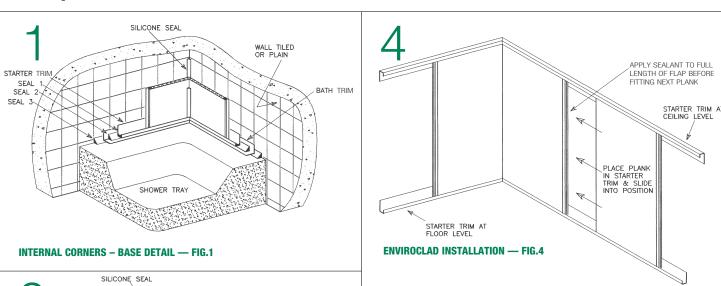

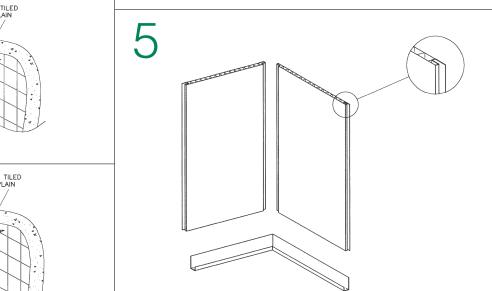

www.enviroclad.com

www.shop.enviroclad.com

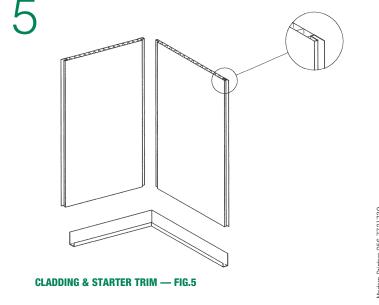



DECORATIVE PANELS

A MODERN ALTERNATIVE TO TILES












facebook.com/enviroclad











info@enviroclad.com facebook.com/enviroclad







Decorative PVC wall panels for Showers, Bathrooms and Kitchens No Grouting – Mould and Mildew Resistant – Easy to Install – Adds Insulation – Reduces Condensation

Price List - Supply Only (inclusive of VAT @ 23%) Ex-Stock

NAME:	DIMENSIONS:

CONTACT NO: DATE:

Description		Size	Unit Price	Quantity	Total Due		
Cladding							
Millennium Range:	pack 4 planks	1000mm x 2.65m					
	per plank	250mm x 2.65m					
Gloss White, Sandstone, Grey, Green, Pink, Beige							
Decor:	pack 4 planks	1000mm x 2.65m					
Panels to be fitted	per plank	250mm x 2.65m					
in sequence 1-4	vence 1-4 Wood Block, White Wash Pine, Marble Tile, Bronze Tile, Stone Tile, Slate Tile						
Elegance:	pack 4 planks	1000mm x 2.65m					
Panels to be fitted	per plank	250mm x 2.65m					
in sequence 1-4 Wave, Stone, Anthracite Tile Small, Anthracite Tile Large, Modern Tile Small, Modern Tile Large							
Impressions:	pack 4 planks	1000mm x 2.65m					
Panels to be fitted	per plank	250mm x 2.65m					
in sequence 1-4	Red Brick, White Brick, Oak, Slate, Bar Mosiac, Sandstone Tile, Customised						

Trims, etc	Size	Colour	Price
Internal Corner (optional)	2.7m	White, Black	
External Corner	2.7m	White, Black	
Flexible Angle 25x25mm	2.5m	White	
Starter Trim	2.7m	W, Blk, Beige	
Chrome/Silver Starter Trim 10mm	2.44m	Aluminium	
Chrome/Silver Corner Trim 10mm	2.44m	Aluminium	
Joiner	2.7m	White	
Silicone 799	310ml	White	
The Works Adhesive	310ml	White	
Adhesive 796	310ml	White	
Adhesive – Foil Pack 796	600ml	White	
Adhesive Gun	for 600ml foil	n/a	
Bath Trim	1.83m	White	
Angle	20x20mm x 3m	White	
Angle	30x30mm x 3m	White	
Coving	2.6m	White/Silver	
Skirting Tara	125mm x 2.5m	White	
Architrave Tara	70mm x 2.5m	White	
Smart Skirting	70mm x 2.5m	White/Woodgrain	
Window Board – per metre		White	
Stainless Steel Panel/Toughened Glass	600 x 400mm	S/less Steel	
Dado Rail	25mm x 2.6m	W, Blk, Cream	
Dado Rail Joiner	50mm x 2.4m	White	

Total Cost - Supply Only:

Estimated Cost of Fitting:

Shop online: www.shop.enviroclad.com

MILLENNIUM





















MODERN TILE SMALL

DECOR





























Bar Mosiac

Delivery service available nationwide — please call for details.