

enViroclad
systems ltd.



DECORATIVE PANELS

A MODERN ALTERNATIVE TO TILES



Unit 57b, Hebron Industrial Estate,
Hebron Road, Kilkenny, Ireland.
R95 KX64



+353 56 7752866



info@enviroclad.com



www.enviroclad.com



facebook.com/enviroclad

CLADDING



Decorative PVC wall panels for Showers, Bathrooms and Kitchens
No Grouting – Mould and Mildew Resistant – Easy to Install – Adds Insulation – Reduces Condensation

Price List – Supply Only (inclusive of VAT @ 23%) Ex-Stock

NAME: _____ DIMENSIONS: _____

DATE: _____ CONTACT NO: _____

Description		Size	Unit Price €	Quantity	Total Due
Cladding					
Millennium Range:	pack 4 planks	1000mm x 2.7m	33.00		
	per plank	250mm x 2.7m	8.50		
<i>Gloss White, Sandstone, Grey, Green, Pink, Beige</i>					
Millennium Decor:	pack 4 planks	1000mm x 2.7m	38.00		
<i>Panels to be fitted in sequence 1-4</i>	per plank	250mm x 2.7m	10.00		
<i>Wood Block, White Wash Pine, Marble Tile, Bronze Tile, Stone Tile, Slate Tile</i>					
Millennium Elegance:	pack 4 planks	1000mm x 2.7m	43.00		
<i>Panels to be fitted in sequence 1-4</i>	per plank	250mm x 2.7m	11.50		
<i>Wave, Stone, Rustic Wood, Modern Tile Small, Modern Tile Large</i>					
	pack 4 planks	1000mm			
	per plank	250mm			
Trims, etc					
Internal Corner	2.7m	White, Black	7.75		
External Corner	2.7m	White, Black	7.75		
Flexible Angle 25x25mm	2.5m	White	4.50		
Starter Trim	2.7m	W, Blk, Beige	4.50		
Joiner	3.0m	White	5.10		
Silicone	310ml	White	5.00		
The Works Adhesive	310ml	White	7.10		
Adhesive	310ml	White	5.00		
Adhesive – Foil Pack	600ml	White	6.00		
Adhesive Gun	for 600ml foil	n/a	50.00		
Bath Trim	1.83m	White	5.70		
Angle	20x20mm x 3m	White	4.00		
Coving	2.6m	White/Silver	9.00		
Skirting Tara	125mm x 2.5m	White	20.00		
Architrave Tara	70mm x 2.5m	White	15.00		
Window Board – per metre		White			
Stainless Steel Panel	600 x 400mm	S/less Steel	40.00		
Dado Rail	25mm x 2.6m	W, Blk, Cream	25.00		
Dado Rail Joiner	50mm x 2.4m	White	12.50		
Chequered Border (each)	40 x 240mm	Blue/Gold	2.80		
Total Cost - Supply Only:			€		
Estimated Cost of Fitting:			€		
DELIVERY OR INVOICE ADDRESS:			CHEQUE GUARANTEE DETAILS:		

Shop online: www.shop.enviroclad.com

Delivery service available nationwide — please call for details.

Product Features

- Hygienic - reduces mould & mildew.
- Adds insulation - for heat & sound.
- Can be applied to virtually all surfaces - including tiles.
- No grouting.
- Quick, easy and clean to install.
- Easy to clean and maintain.
- Range of versatile profile fittings.
- Can be fitted onto existing ceilings - no more painting!

Technical Specification

- High impact modified u-PVC.
- 8mm twin-wall construction.
- Reaction to fire classification: C - s3, d0
- Interlocking, 'tongue and groove' design with a flush flat finish.
- Range of edging and corner profiles.
- Optional finish products - borders, coving, skirting, dado.


Cleaning & Maintenance

- Ensure traces of adhesive and silicone sealant are removed from surface of cladding before they set.
- Use a mild soap solution and soft damp cloth to clean.
- Avoid use of abrasive or harsh chemical cleaning agents.
- Please request samples as colours may vary during printing of brochures.
- Colours may vary from batch to batch.


Limitations of Use

- Possible adverse reaction to solvent based adhesives - use recommended adhesives only.
- Application of adhesives, including adhesive tapes, to printed surface is not recommended.
- Exposure to extreme heat source may result in distortion of product.
- Despite a high level of surface protection, prolonged exposure to U.V. may result in colour variation.


Terms and Conditions can be viewed at www.enviroclad.com/terms

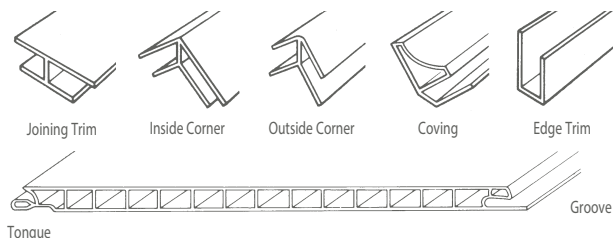


MILLENNIUM

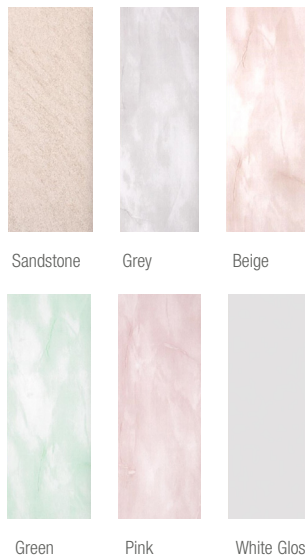

MILLENNIUM DECOR

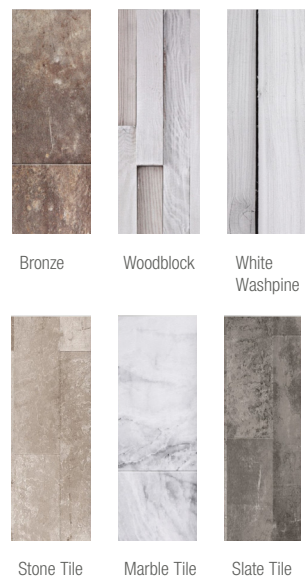


MILLENNIUM ELEGANCE

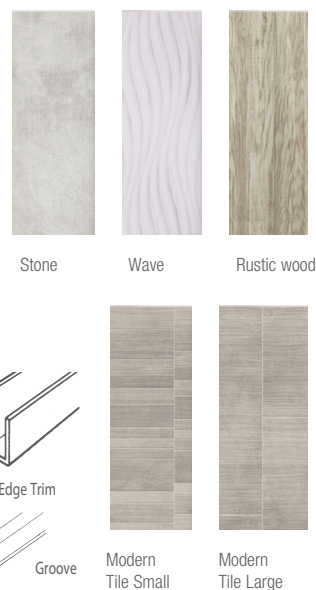


HOW TO INSTALL


- Ensure walls are clean & dry. Remove loose tiles, loose paper, flaking paint.
- Ensure shower tray/bath is fully installed. Remove/loosen fittings from walls. (Shower fittings, soap holders, etc).
- Seal bath trim (if using) into position.
- Fit bottom Starter trim onto Bath seal using sealant (Fig. 1).
- **Fill bottom Starter trim with sealant.**
- At a corner, fit Internal Corner Profile, seal with silicone or apply bead of silicone (Figs.2 & 3).
- Cut first plank to length - less 10mm, to allow fitting into top and bottom Starter trims (also allows for expansion).
- Apply adhesive to reverse of plank - horizontal strips to width of plank, approx. every 400mm.
- Fit plank in position & press firmly onto wall.
- If cladding shower/over bath, seal lip of each plank with silicone before fitting the next to ensure watertight seal (Fig. 4).
- Cut top Starter trim to length, place in position and continue (Fig. 5).
- External Corner profiles are available for use on corners if required.
- When fitting cladding to a shower, Starter trim can be used as a stop bead at shower door or to finish edge of the final plank.
- Ensure adhesive and sealant are cleaned from face of cladding before they set.
- Cladding can be fitted behind radiators but is not suitable for use with a direct heat source, e.g. solid fuel cookers (heat greater than 60°C). A stainless steel panel should be fitted behind cookers/hobs.
- Please refer to the current brochure for full product details.
- Recessed Lighting: Please note that only PL or CL type low energy downlighters are suitable for use with Enviroclad ceiling panels
- Return of goods will be accepted within 30 days with proof of purchase.
- Fitting at the fitter's discretion.

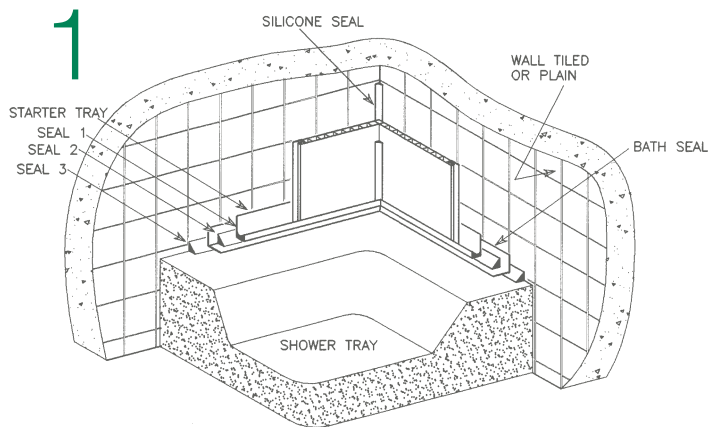


INTERNAL CORNERS – BASE DETAIL — FIG.1

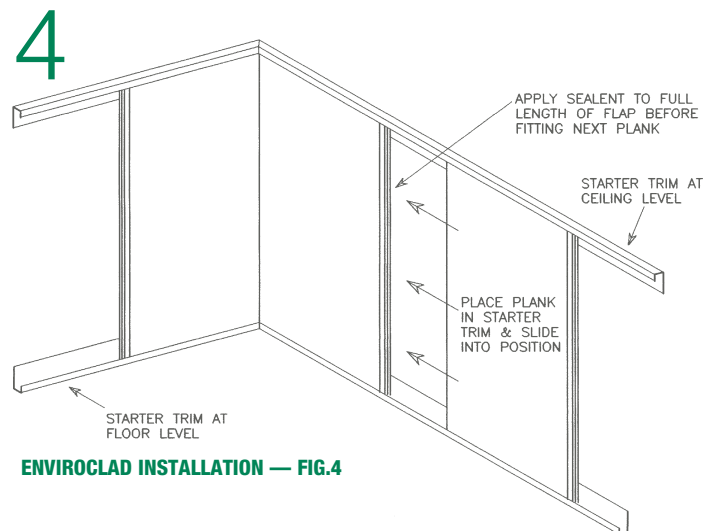


ENVIROCLAD INSTALLATION — FIG.4

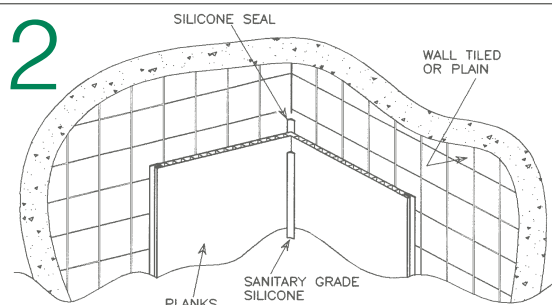

INTERNAL CORNERS (USING SEALANT) — FIG.2

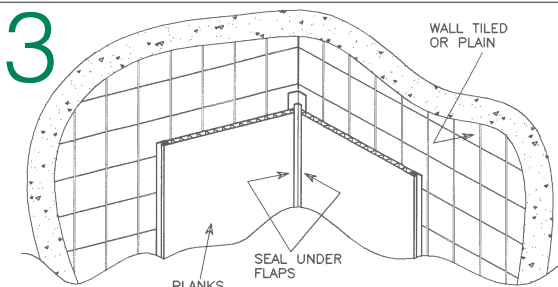

INTERNAL CORNERS (USING PVC PROFILE) — FIG.3

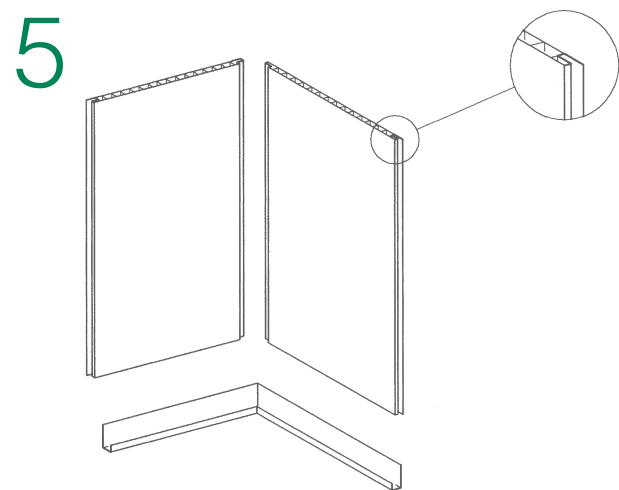

CLADDING & STARTER TRIM — FIG.5



+353 56 7752866



info@enviroclad.com



www.enviroclad.com



facebook.com/enviroclad